

Technical Data BA26IP

Performances	rps	40		80		90		60	
		A7W35	A2W35	A-7W35	A-15W35	A7W55			
Heating Capacity	kW	5,55	4,66	7,85	7,93	7,85			
Cooling Capacity	kW	4,57	3,62	5,44	5,44	5,65			
Power In	kW	1,07	1,13	2,56	2,63	2,32			
COP	-	5,18	4,13	3,07	3,01	3,39			
Operating Current	A	5,1	5,4	12,2	12,6	11,1			

Compressor

Type	BLDC Inverter		
Speed	15-110	1/s	
Oil	PZ68S	0,75	l
LRC	-	A	
Max. Op. Current	21	A	

Evaporator

Type	Coil		
Material	Al/Cu		
Heat Transfer Area	21	m ²	
Fin Spacing	2	mm	
Max Overpressure	4,2	Mpa	
Air Flow	max.3500	m ³ /h	
Fan Motor	max. 0,1	kW	
Fan Diameter	450	mm	
Speed	max.700	1/min	
Sound Power Level	53	dB"A"	
Defrost	reversal		

Condenser

Type	PHE		
Material	AISI316		
Water Flow	0,27	kg/s	
Minimum flow	0,13	kg/s	
Temp. Difference	5	K	
Water volume	7,0	l	
Max. Water Overp.	250	kPa	
Max. Ref. Overp.	4,2	MPa	
Pump Ext. Head	6,0	m	
Pump Motor	max.70	W	

Refrigerant Circuit

Refrigerant	R290		
Charge	0,9	kg	
PHE leak protection**	35% Propylene Glycol		
R290 leakage sensor	Yes		

** IEC 60335-2-40:2022, OBLIGATORY USE

Aux. Heater

Heating Capacity	5,7(+2,8)	kW
------------------	-----------	----

Controls

Controller	pCO5
EEV	Yes
Water Probe	Yes
SHW Probe	Yes
Outdoor Probe	Yes
Dynamic Set Point	Yes
Refrigerant Probe	2xPT

Power Supply

Voltage	1x230 or 3x400 V	
Frequency	50	Hz
Max. Current C (H)	20/(16)/(16) A	

Connections and Dimensions

Hot Water	1	"OD
He x Wi x De	90x130x53	cm
Weight	130	kg

Limits

Water Overpressure	0,25	MPa
Ref. Overpressure	2,9	MPa
Air Min/Max	-20/+35	°C
Water Min/Max	20/65	°C

*A2W35, acc. to EN14511, condenser dT=5K

"A2" Air Inlet +2°C

"W35" Water Outlet 35°C


Defrost energy considered.

Performance Tolerance EN14511

Ecodesign	35°C	55°C
Pdesign	6,57	6,22 kW
SCOP	5,14	3,83 -
ETAs	203	150 %
Rating	A+++	A+++

Technical Data BA26IP

Performance *

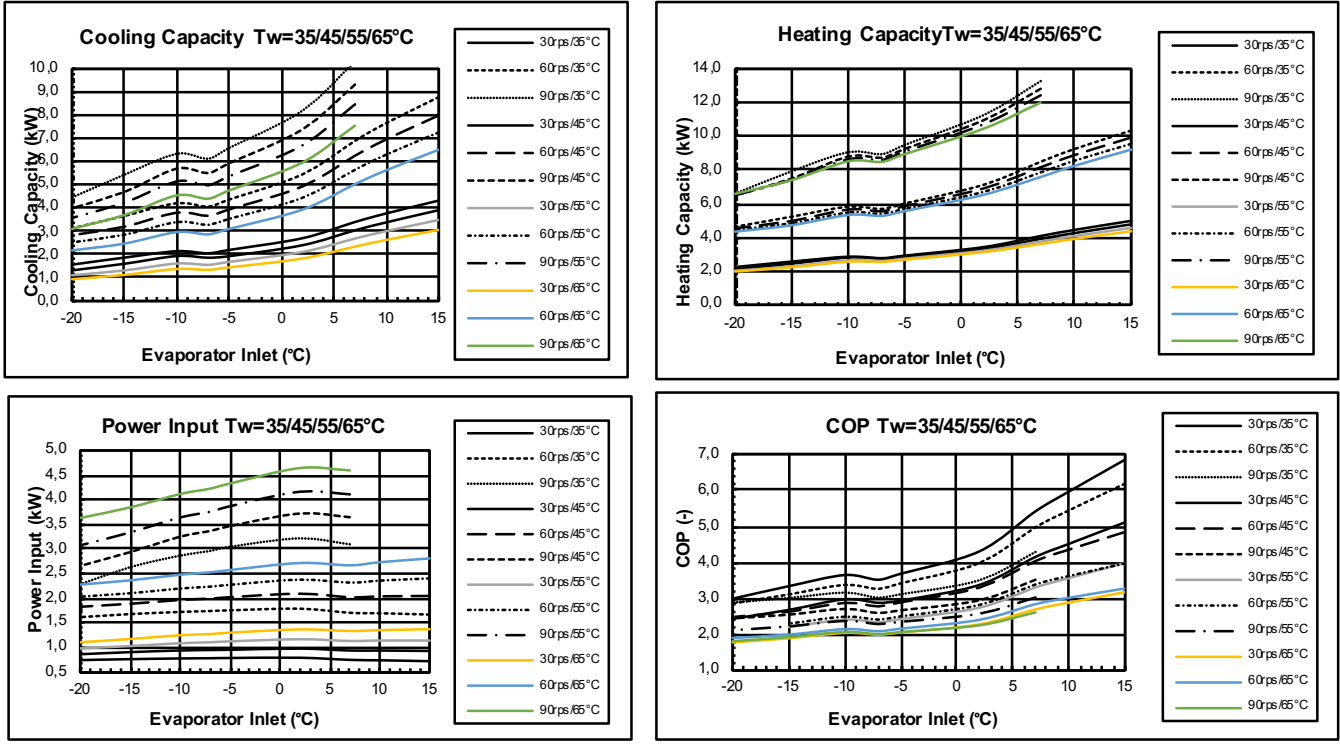

* Performance Tolerance ±5%, defrost energy included

Dimensions, Connections

